

SPECIFICATION  
**IL-TG-WW-2538-240**  
 THINGLOW SERIES

PROJECT	DATE
TYPE	QTY



**FLEXIBLE LED STRIPS FOR COVE AND STEP LIGHTING**



**INDOOR WW**

**IL-TG-WW-2538-240-IP20**


- IP20 (Non-Waterproof) SMD 5050 Flexible LED Strip
- LED Qty: 240LED s/m
- Dimensions: 500mm x 6mm x 0.22mm
- Voltage: DC 12/24V
- Power Consumption: (12V/24) 19.2 W/m
- 3/6 LED cuttable
- Dimmable with suitable driver or controller

**OUTDOOR WW**


**IL-TG-WW-2538-240-IP68**

- IP68 (Waterproof) SMD 5050 Flexible LED Strips, Silicone Tube + Silicone Glue
- LED Qty: 240LED s/m
- PCB Dimension: 500mm x 6mm x 0.22mm
- Voltage: DC 12/24V
- Power Consumption: (12V/24) 19.2 W/m
- 3/6 LED cuttable
- Dimmable with suitable driver or controller

**WW-2538 12V - 240 LED/m - 19.2W/m**

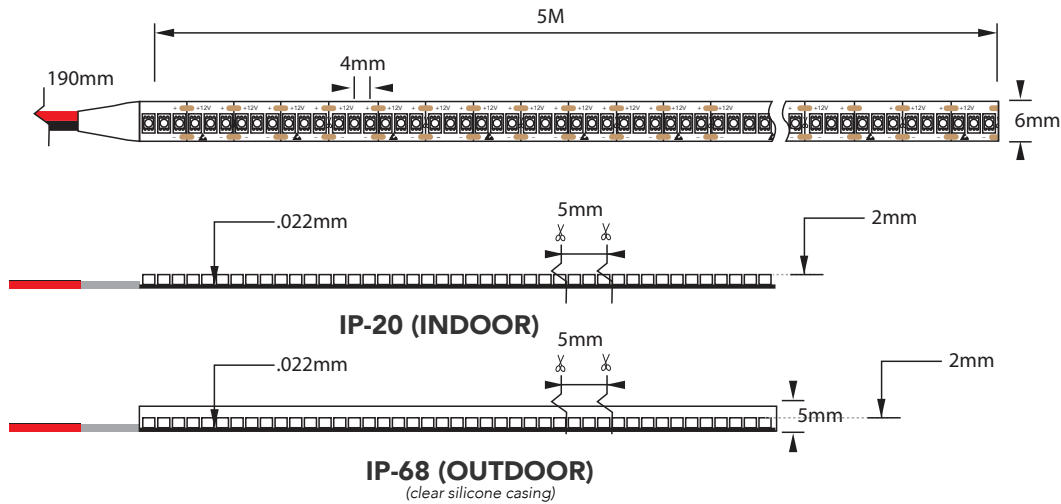

**WW-2538 24V - 240LED/m - 19.2W/m**

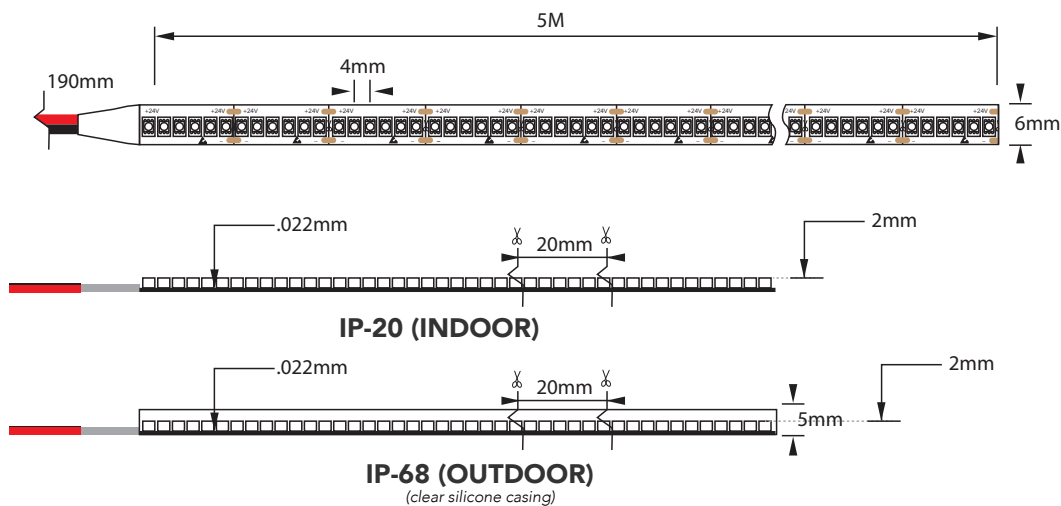

**ORDERING**

MODEL	IP Rating	Voltage	No. Reels
<b>IL-TG-WW-2538-240</b>			
ThinGlow™ Warm White 240 LED/m Flexible LED Strip	20 - IP20 68 - IP68	12 - 12V 24 - 24V	Write number of reels needed above



A Division of Impact Lighting Inc.



2814 Silver Star Rd., Orlando, Florida 32808 • Ph. 1-800-507-5714 • Email: sales@epixsky.com

epixsky.com